

The most versatile and powerfully dynamic model in the line, the PD-6LCRi is a true left, center & right channel In-Wall speaker that can be mounted either as a horizontal center channel or vertical LCR. With the proprietary Neo3PDR planar ribbon tweeter, it also minimizes any floor or ceiling reflections, improving the sound clarity and accuracy for a breathtaking home theater or two-channel experience.



To add to the tweeter's stunning dispersion and resolution, the PD-6LCRi features an innovative woofer with high excursion capabilities and very low distortion. This high tech woofer design makes use of compact Neodymium magnets to provide an acoustically transparent woofer chassis which dramatically improves midrange clarity by eliminating sound reflections directly behind the woofer. The superior Kevlar™ cone woofers used in the PD Series not only provide lifelike two-channel clarity but are also capable of achieving the extreme dynamics associated with high performance home theater applications.

As with the entire PD Series, the PD-6LCRi is crafted from high impact, poly-composite frames that are well suited for the entire home. Rugged, paintable surfaces are the perfect architectural complement for custom installations where there is zero tolerance for error and a maximum need for discrete high fidelity.

Crisp and clear. Astonishingly versatile. The PD-6LCRi makes design and install of a high performance In-Wall sound system not only possible but remarkably simple.

- **Wide dispersion** Exclusive patented wideband PDR planar ribbontweeter rotates for an extremely wide sweet spot over the entire listening environment
- **Powerful** Kevlar™ cone woofers feature a rubber surround, Neodymium magnet and acoustically transparent chassis for high output with minimal distortion
- **Easy to install** Improved poly-composite frames (paintable), rust-resistant metal grills and glass-filled composite toggle clamps simplify installation



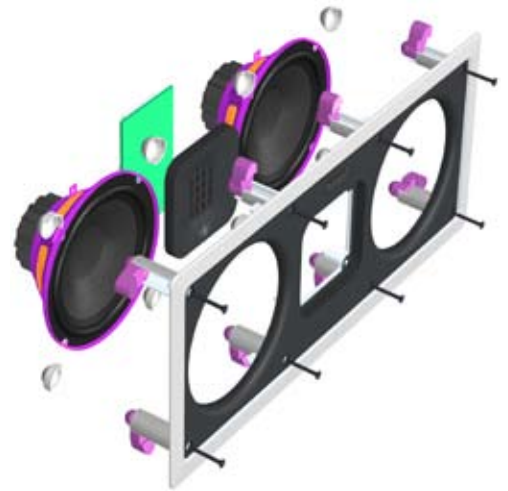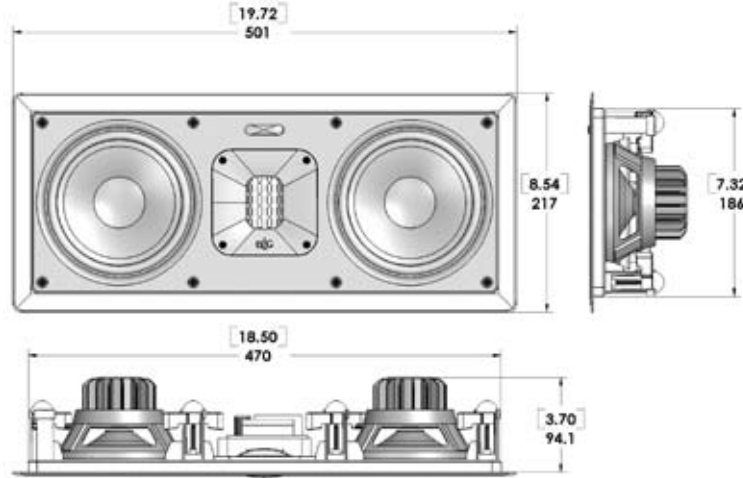

> GENERAL PARAMETERS:

Description	2-way hybrid array
Dimensions	19 3/4" x 8 9/16"
Weight	5.4 lbs.
Cutout size	18 5/8" x 7 1/2"
Installed depth	3 3/4" from surface
Driver complement	2 x 6" Kevlar™ cone, Neo magnet woofers 1 x Neo3PDR planar ribbon tweeter
Nominal impedance	4 ohms per channel
Frequency response	50 Hz - 25 kHz (-6dB, half space)
Power handling	150 W RMS
Sensitivity	90 dB/1W/1M
Crossover frequency	2.3 kHz, passive
Adjustments	0 dB, -2 dB, -4 dB tweeter level adjustment
Installation	The PD Series loudspeakers use high-quality, glass-filled, composite dog-toggle clamps for easy mounting in panel thicknesses from 1/4" - 1 5/8"
Warranty¹	Lifetime

¹Please see BG warranty for complete details